



भेरीगंगा नगरपालिका
नगर कार्यपालिकाको कार्यालय
छिन्चु, सुर्खेत
कर्णाली प्रदेश, नेपाल

Fax ०८३- ५४०११०
Phone ०८३- ५४०१५४

प.सं. :- ०८१/०८२
च नं : ३०६२

मिति: २०८२/०३/०३

प्रथम पटक प्रकाशित मिति: २०८२/०२/२५

दोश्रो पटक प्रकाशित मिति: २०८२/०३/०३

विषय :- दररेट पेश गर्ने बारे सूचना ।

श्री सम्बन्धित सरोकारवाला सबै ।

प्रस्तुत बिषयमा यस भेरीगंगा नगरपालिकाको तपसिलमा उल्लेखित कार्य गर्नुपर्ने देखिएको हुदा यस कार्यालय बाट सूचना प्रकाशित भएको मितिले ७ दिन भित्र (मिति २०८२/०३/०९ गते दिनको ५:०० बजे सम्ममा) इच्छुक सप्लायर्स/फर्महरूले भेरीगंगा नगरपालिकाको वेबसाइट www.bherigangamun.gov.np मा यसै सूचना साथ राखिएको BOQ भरि सुचिकृत भई आफ्नो दररेट सिलबन्दी गरि यस नगरपालिकाको कार्यालयमा पेश गर्नुहुन सम्बन्धित सरोकारवालामा यो सूचना प्रकाशित गरिएको छ ।

नोट: म्याद नाघी पेश भएका प्रस्ताव मान्य हुने छैन ।

क्र.सं.	कार्यक्रमको नाम	अधिकतम रकम रु. (भ्याट सहित)	आवश्यक कागजात
१.	किन्जल खाजा घर देखि गोलपार्क जोड्ने सडक स्तरउन्नति (भाग-२), भेरीगंगा ९	रु.४,२०,९८२.१०/-	१. आ.व.२०८०/०८१ को करचुक्ता प्रमाणपत्रको प्रतिलिपि
२.	रत्नराजमार्ग देखि थानिचौर जोड्ने अधुरो सडक कालोपत्रे (भाग-२), भेरीगंगा १०	रु.७,४२,२६०.६६/-	
३.	खल्टुकुरा टोलमा लिफ्टसिचाईमा ट्रान्सफर्मर, फुलबारीटोल छन्त्याल बस्तीमा सिचाई पाईप खरिद र खहरेखोला बिरबहादुर बुढाको घर नजिक खानेपानी पाईप खरिद, भेरीगंगा १३	रु. ४,८१,५०५.३३/-	२. फर्म/सप्लायर्स दर्ता संग सम्बन्धित सम्पूर्ण कागजातहरूको प्रतिलिपि
४.	ऋषि स्मृति बाटिका अधुरो भवन निर्माण कार्य, भेरीगंगा १०	रु. २,१६,२३३.९३/-	३. सुचिकृत भएको रसिद तथा प्रमाणको प्रतिलिपि
५.	भेरीगंगा वडा नं ७ मा बायोस्याण्ड फिल्टर वितरण	रु. २,९९,४५०/-	

(Signature)

(Signature)

नि. प्रशासकिय अधिकृत
)




Bheriganga Municipality
Office Of Municipal Executives
Chhinchu, Surkhet
Karnali Province

BILL OF QUANTITIES (BOQ)

Project Name: किन्जल खाजाघर देखि गोलपार्क जोड्ने सडक स्तारुन्नती

(भाग २)

Location : Bheriganga Municipality -9, Surkhet

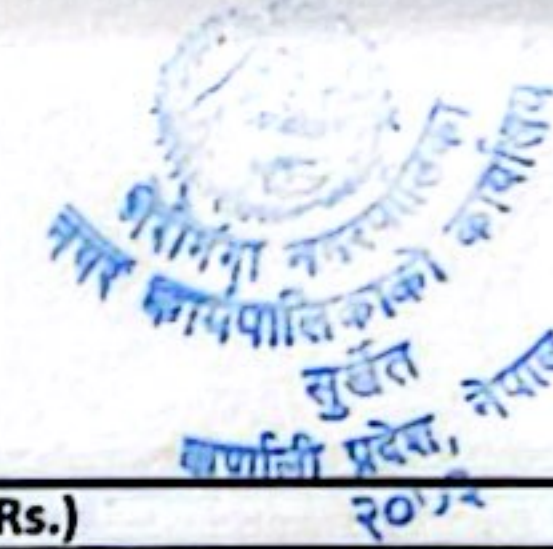

F/Y:2081/082

प्रमुख प्रशासकिय अधिकृत

S.N.	Description of Items	Unit	Quantity	Unit Rate (NRs.)		Amount (NRs.)	Remarks
				In Figures	In Words		
1	Earth work in excavation Road way & Earthen drain including disposal 50m and lift upto 1.5m all complete as per specifications by machine	M3	8.00				
2	Dry stone soling / paving / filling in foundation without sand lead up to 30 mtr.	M3	1.00				
3	Cement Concrete Works (1:2:4) in Rounded Aggregate). It includes mixing,placing in position, vibrating, compacting,finishing,curing and all other incidents including formworks.	M3	1.00				
4	Cement Concrete Works (1:1.5:3) for RCC in Superstructure (Using Crushed Aggregate) including formworks	M3	2.00				
5	Providing and laying Reinforcement Fe 500 including cutting, bending, binding, fixing in position etc. all complete as per drawing and technical specification	Kg	241.12				
6	Providing and placing plum concrete (Boulder mixed Concrete) with 60% M15/40 concrete and 40% boulders/stones as per specification, using concrete mixer and vibrator including formworks, curing, testing etc. all complete as per specification and drawing.	M3	3.00				
7	Drain clearance including disposal 50m and lift upto 1.5m all complete as per specifications by site in charge	M2	40.00				
8	Scarifying the existing road surface upto a depth of 20 cm and construction of sub-grade with in all lifts and lead as per Drawing and Technical Specifications.	M2	180.00				
9	Providing, laying, spreading, watering, levelling and compaction of scarified subbase material to construct subbase grading all completed as directed by engineer	M3	21.60				
10	Providing and laying crusher run macadam on a prepared surface, spreading and mixing, watering and compacting to form a layer of base course with stone dust as per drawing and technical specifications. (by mix in place method)	M3	18.00				
11	Providing and applying prime coat with MC 30/70 of Hot Bitumen (including cutter) on prepared surface of granular base including cleaning of road surface and spraying (Spray Rate @ 0.90 per Sq.m) as per Technical Specification .	Litre	162.00				
12	Providing and applying tack coat with hot Bitumen at specified rate on the prepared non-bituminous surfaces including cleaning as per Technical Speciation . (Spray Rate @ 0.50 per Sq.m)	Litre	90.00				
13	Providing and laying dense bituminous macadam using crushed aggregates of specified grading, premixed with bituminous binder and filler as per Drawing and Technical Specifications.	M3	7.20				



Bheriganga Municipality
Office Of Muncpal Executives
Chhinchu, Surkhet
Karnali Province

BILL OF QUANTITIES (BOQ)

Project Name: किन्जल खाजाघर देखि गोलपार्क जोड्ने सडक स्तारुन्नती

(भाग २)

Location : Bheriganga Municipality -9, Surkhet

F/Y:2081/082

कृष्ण प्रसाद पोखरेल
प्रमुख प्रशासकिय अधिकृत

S.N.	Description of Items	Unit	Quantity	Unit Rate (NRs.)		Amount (NRs.)	Remarks
				In Figures	In Words		
14	Providing and laying seal coat sealing(Coarse Sand Seal) the voids in a bituminous surface as per Drawing and Technical Specifications	M2	180.00	कर्णाली प्रदेश, नेपाल २०७३			
15	Providing and installation of project signboards with size of 1.8 x 1.2 m as per specification and instruction of engineer. 40mm thick sheet with Stand post of 40mm black pipe	no	1.00				
TOTAL AMOUNT							
TOTAL VATABLE AMOUNT							
VAT (@13%)							
TOTAL AMOUNT WITH VAT							
TOTAL AMOUNT WITH VAT IN WORDS :							

Name of Firm:
Name of contractor /Representative:
Address:

Date:-
Seal of Firm:
Contact No. :